FLOOR AT THE GROUND LEVEL
SEISMIC FOUNDATION PILLOW whereas $a_g \geq 0.1_g$

WATERPROOFING IN BETWEEN TWO LAYERS OF XPS / CERAMIC TILE FINSHING
BUILDING WITH BASEMENT
M 1:10

4.22.1.1.02

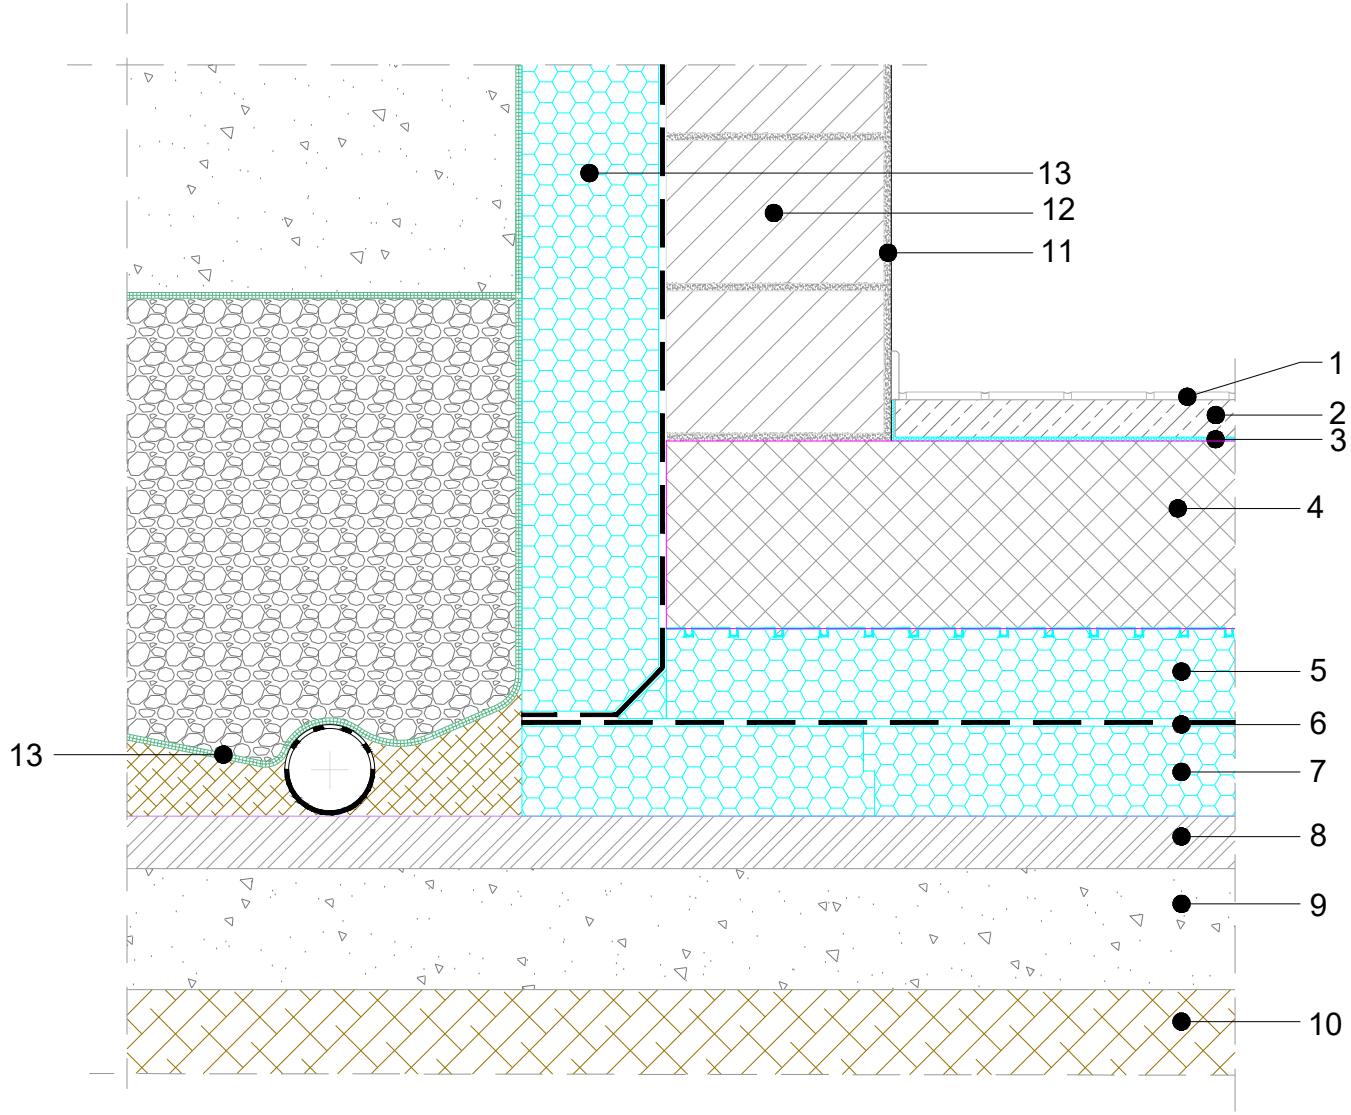

SOMPOSITION OF KEY REŠITVE (dimenzije v detajlu predstavi za bom calculated):

1. CERAMIC TIES
2. CEMENT SCREED
3. EXTRUDED PE FOIL – IMPACT SOUND INSULATION
4. REINFORCED FOUNDATION SLAB
5. FIBRAN*hydro* SEISMIC T–1,8sk/sk –BITUMEN, DOUBLE–SIDED ADHESIVE WATERPROOFING
6* FIBRAN*hydro* T–3sk or
   FIBRAN*hydro* ANTIRADON 1,5sk –BITUMEN, ONE–SIDED ADHESIVE WATERPROOFING
7. FIBRAN*xps* 400–L (500–L, 700–L)
8. LEAN CONCRETE
9. CHRUSHED GRAVEL
10. COMPACTED SOIL
11. INNER PLASTER
12. OUTER WALL
13. FIBRAN*filter* 32

NOTE: - It is not allowed to work with an open flame In the close proximity of the XPS insulation.
- In the case of high groundwaters it is mandatory to install two-layer of waterproffing.
In the case od radon or geopathogenic radiation protection, instead of T-3sk it is recommended to use ANTIRADON 1,5sk
- Instructions for implementation www.fibran.si

The details copyright by FIBRAN d.o.o., tel. technical consulting: + 386 7 3939525/515 E–mail: fibran@fibran.si, web: www.fibran.si Subject to change