


INVERTED FLAT ROOF
 WALKABLE skin SEAL ROOF
 CONCRETE PAVERS ON ADJUSTABLE SUPPORTS
 PARAPET WALL, SCALE 1:10

10.12.3.06

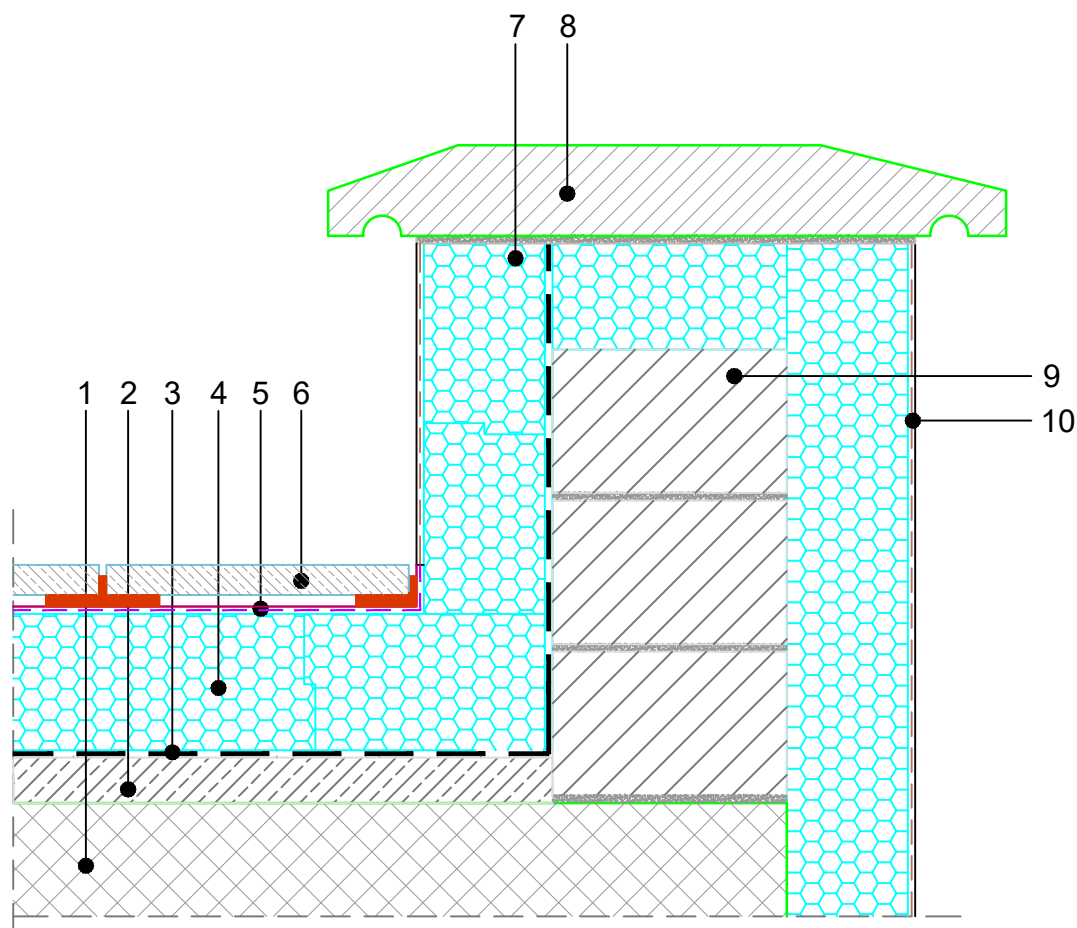

COMPOSITION of system solution (dimensions in detail to be calculated):

1. REINFORCED CONCRETE SLAB
2. INCLINED CONCRETE
3. WATERPROOFING
4. FIBRAN xps 300-L
5. FIBRAN $skin$ SEAL – vapor-permeable, waterproof membrane for quick drainage
6. CONCRETE PAVERS ON ADJUSTABLE SUPPORTS
7. FIBRAN xps ETICS
8. CONCRETE CAPPING STONE
9. PARAPET WALL
10. FACADE PLASTERS

NOTE:

- It is not allowed to work with an open flame in the close proximity of the XPS insulation.
- When choosing type of waterproofing, it is necessary to take into account that chlorides of PVC membrane have neg. affect on XPS.
- joining of FIBRAN $skin$ membrane overlaps with double-sided adhesive tape FIBRAN $tape$ 2SEAL
- Point 2. - Production upon project request