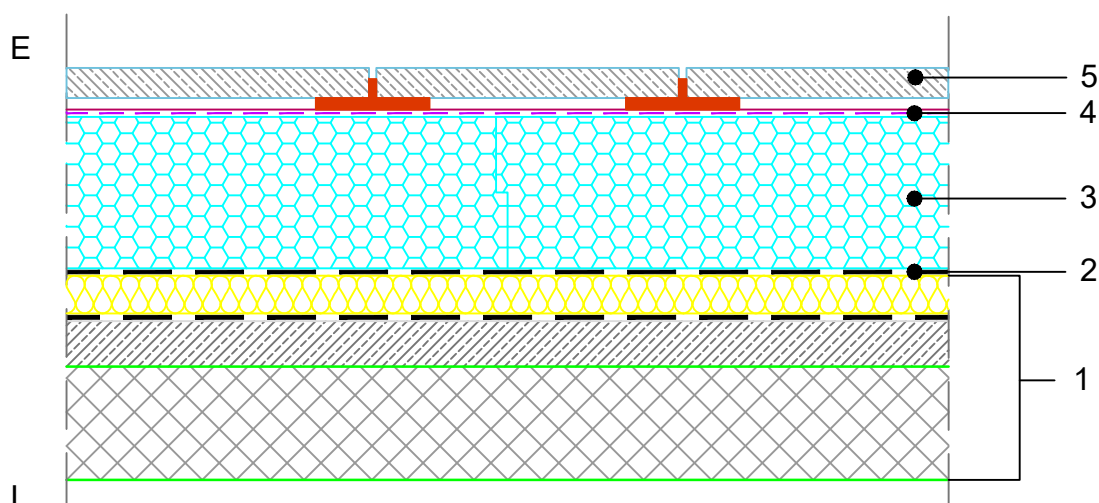


INVERTED FLAT ROOF  
EXISTING ROOF RENOVATION - skin SEAL ROOF  
CONCRETE PAVERS ON SUPPORTS  
CROSS SECTION, SCALE 1:10

**10.15.2.00**

COMPOSITION of system solution (dimensions in detail to be calculated):

1. EXISTING ROOF STRUCTURE
2. WATERPROOFING
3. FIBRAN*xps* 300-L – single layer
4. FIBRAN*skin* SEAL – vapor-permeable, waterproof membrane for quick drainage
5. CONCRETE PAVERS ON SUPPORTS

NOTE: - It is not allowed to work with an open flame in the close proximity of the XPS insulation.  
- When choosing type of waterproofing, it is necessary to take into account that chlorides of PVC membrane have neg. affect on XPS.  
joining of FIBRANskin membrane overlaps with double-sided adhesive tape FIBRANTape 2SEAL