


INVERTED FLAT ROOF
 EXISTING ROOF RENOVATION - skin SEAL ROOF
 CONCRETE PAVERS ON SUPPORTS
 RAINWATER OUTLET, SCALE 1:10

10.15.2.04

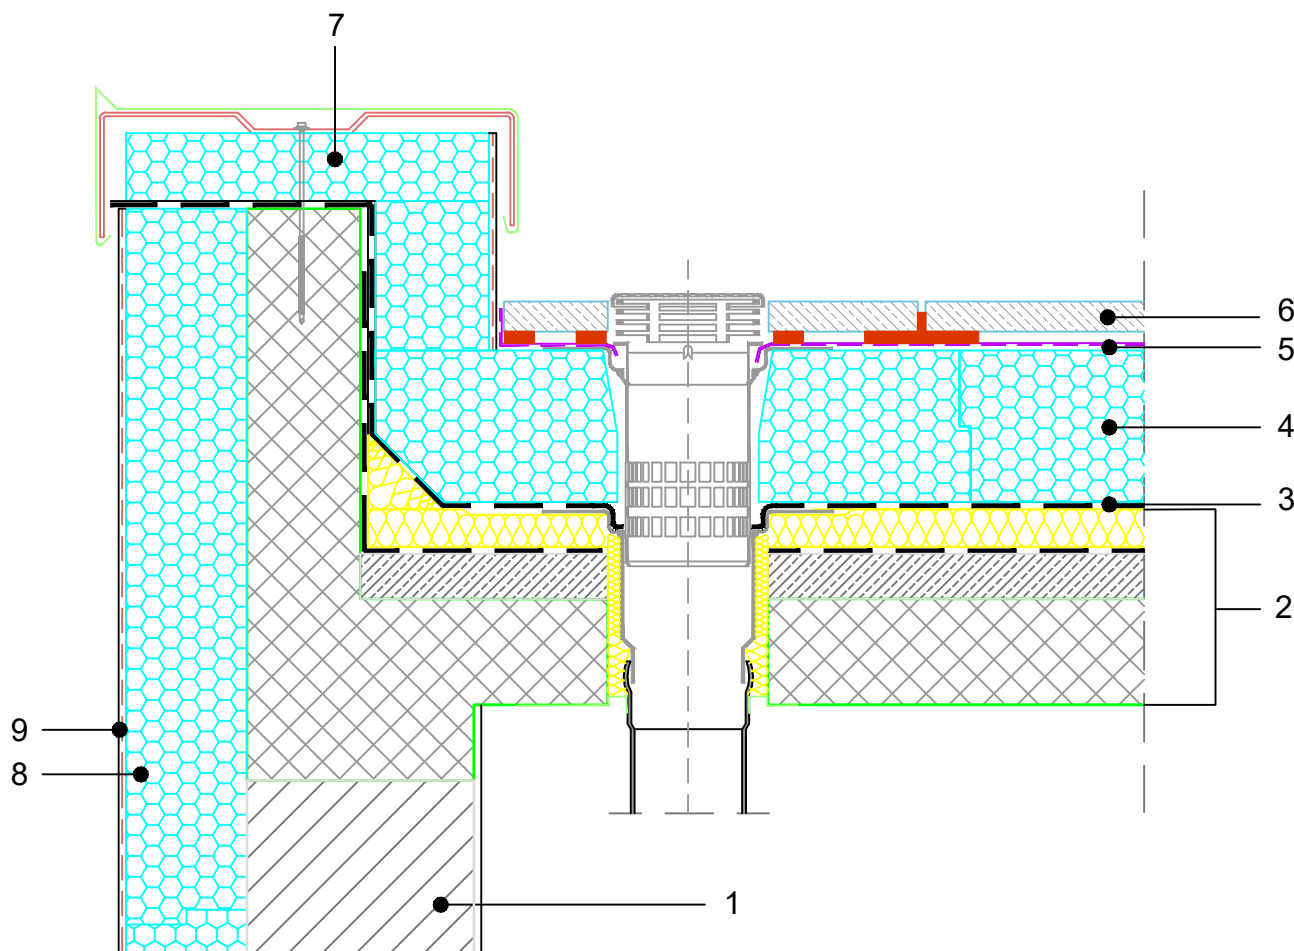

COMPOSITION of system solution (dimensions in detail to be calculated):

1. OUTER WALL
2. EXISTING ROOF STRUCTURE
3. WATERPROOFING
4. FIBRAN xps 300-L – single layer
5. FIBRAN $skin$ SEAL – vapor-permeable, waterproof membrane for quick drainage
6. CONCRETE PAVERS ON SUPPORTS
7. FIBRAN xps
8. FIBRAN xps ETICS
9. FACADE PLASTERS

NOTE:

- It is not allowed to work with an open flame in the close proximity of the XPS insulation.
- When choosing type of waterproofing, it is necessary to take into account that chlorides of PVC membrane have neg. affect on XPS.

joining of FIBRAN $skin$ membrane overlaps with double-sided adhesive tape FIBRANTape 2SEAL