


INVERTED FLAT ROOF
 WALKABLE OPTIMO skin SEAL ROOF
 CONCRETE PAVERS ON SUPPORTS
 PARAPET WALL WITHOUT THERMAL BRIDGE, SCALE 1:10

10.18.2.01

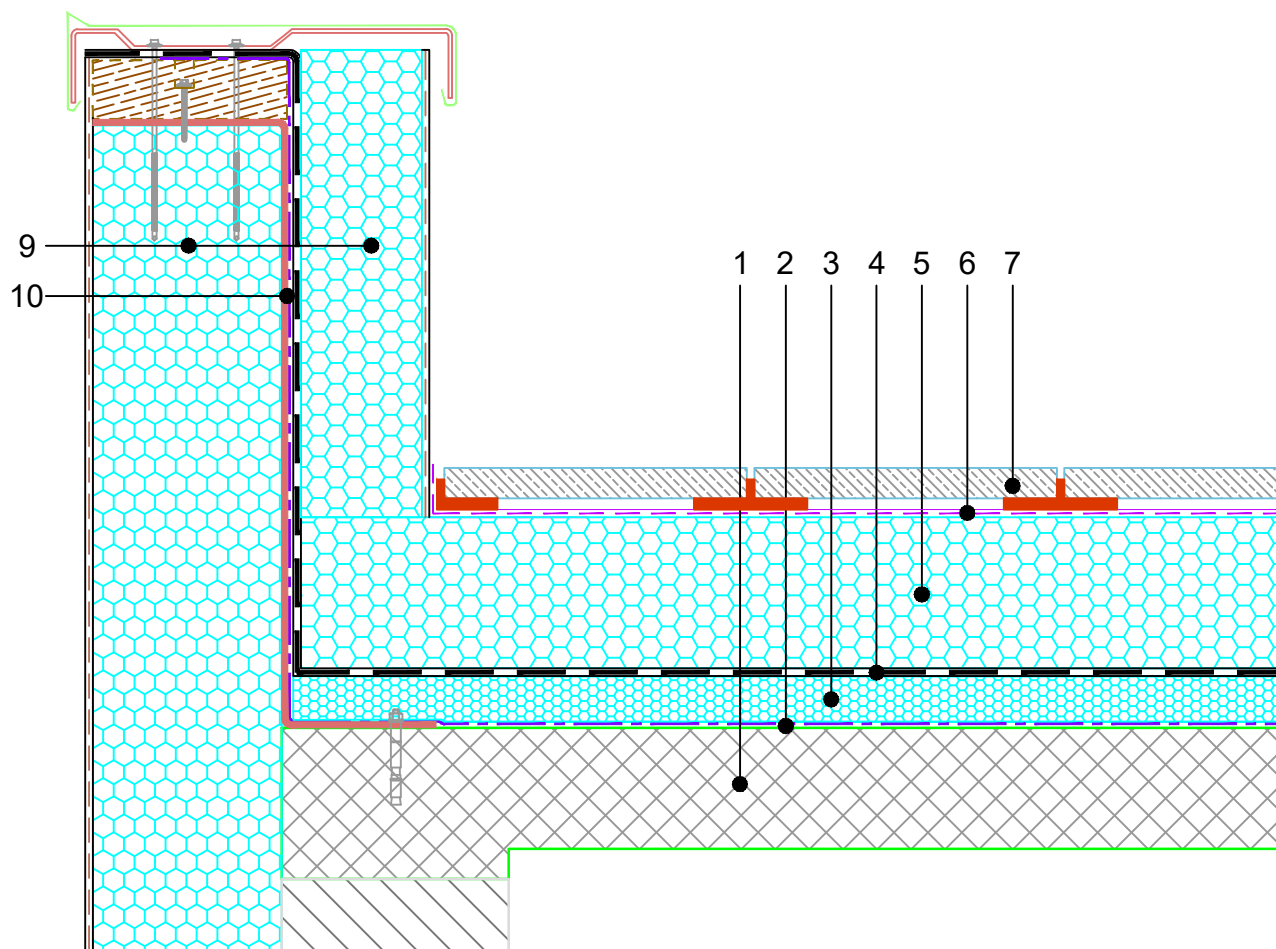

COMPOSITION of system solution (dimensions in detail to be calculated):

1. REINFORCED CONCRETE SLAB
2. FIBRANskin BARRIER – ALU. VAPOUR BARRIER
3. FIBRANxps 300–I as underlining for INCLINE sheets
4. TAPERED INSULATION FIBRANxps INCLINE
5. WATERPROOFING
6. FIBRANxps 300–L – single layer
7. FIBRANskin SEAL – vapor–permeable, waterproof membrane for quick drainage
8. CONCRETE PAVERS ON SUPPORTS
9. FIBRANxps ETICS GF
10. STEEL STRUCTURE / app 2 m

NOTE:

- It is not allowed to work with an open flame in the close proximity of the XPS insulation.
- When choosing type of waterproofing, it is necessary to take into account that chlorides of PVC membrane have neg. affect on XPS.
- FIBRANskin membrane overlaps to be bonded with double-sided adhesive tape FIBRANTape 2SEAL
- Point 2. - Production upon project request