


INVERTED FLAT ROOF
 WALKABLE OPTIMO skin SEAL ROOF
 CONCRETE PAVERS ON SUPPORTS
 DILATATION, M 1:10

10.18.2.05

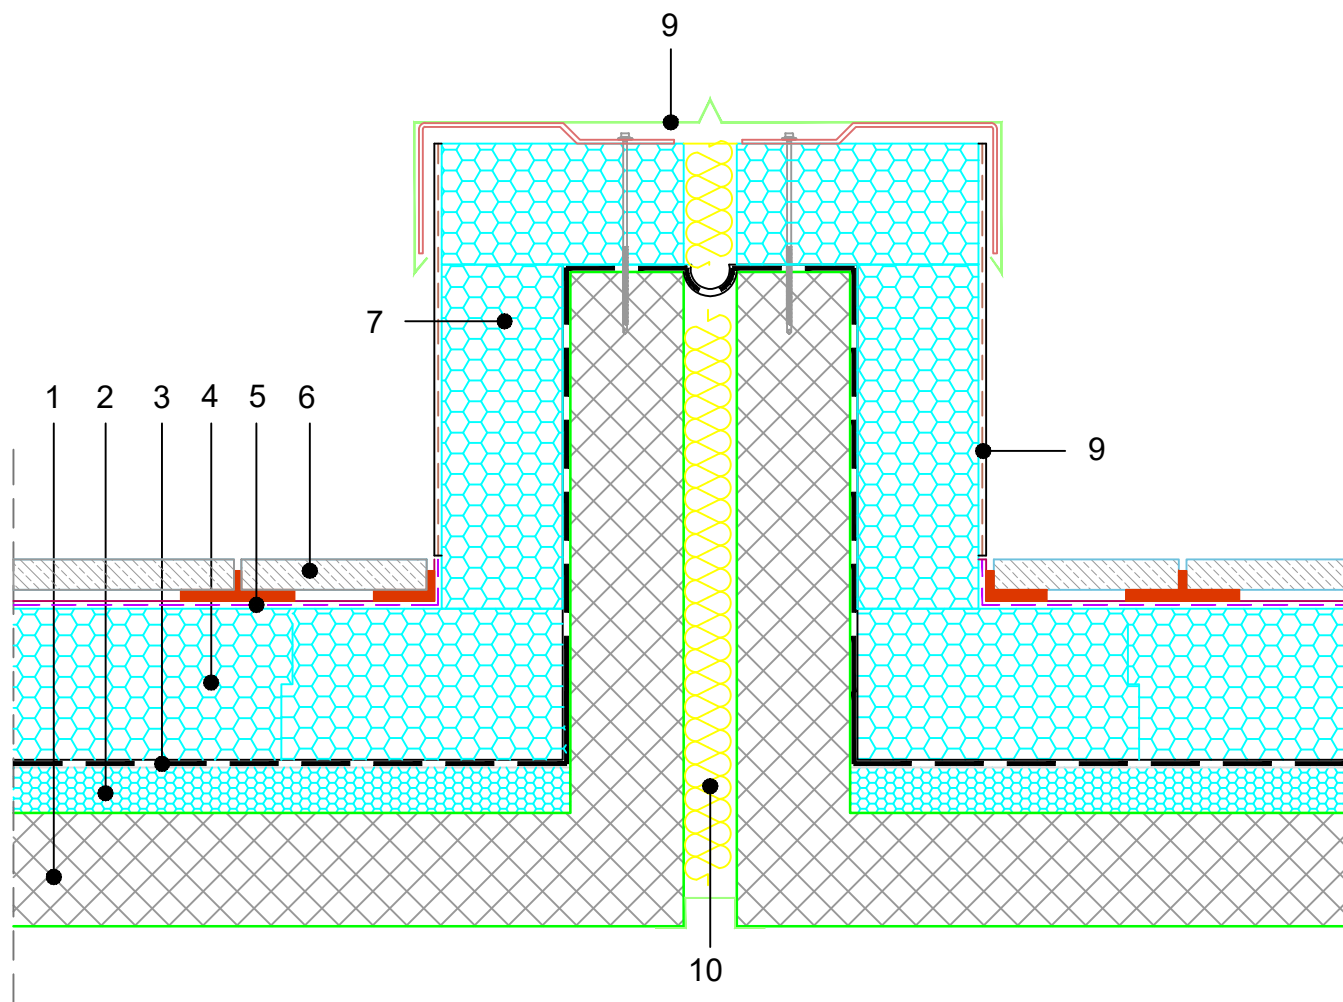

COMPOSITION of system solution (dimensions in detail to be calculated):

1. REINFORCED CONCRETE SLAB
2. TAPERED INSULATION FIBRAN*xps* INCLINE
3. WATERPROOFING
4. FIBRAN*xps* 300-L
5. FIBRAN*skin* SEAL – vapor-permeable, waterproof membrane for quick drainage
6. CONCRETE PAVERS ON ADJUSTABLE SUPPORTS
7. FIBRAN*xps* ETICS
8. DILATATION METAL COPPING
9. FACADE PLASTERS
10. SOFT INSULATION

NOTE:

- It is not allowed to work with an open flame in the close proximity of the XPS insulation.
- When choosing type of waterproofing, it is necessary to take into account that chlorides of PVC membrane have neg. affect on XPS.
- FIBRAN*skin* membrane overlaps to be bonded with double-sided adhesive tape FIBRAN*tape* 2SEAL
- Point 2. - Production upon project request